

Main 1-8 Output – DB25 Male on Cable				
Function	Channel	Function	Pin	Connector Rear
		Chassis	13	
Left	1	Gnd	25	
		Cold	12	
		Hot	24	
Right	2	Gnd	11	
		Cold	23	
		Hot	10	
Center	3	Gnd	22	
		Cold	9	
		Hot	21	
LFE	4	Gnd	8	
		Cold	20	
		Hot	7	
L.Side	5	Gnd	19	
		Cold	6	
		Hot	18	
R.Side	6	Gnd	5	
		Cold	17	
		Hot	4	
L.Back	7	Gnd	16	
		Cold	3	
		Hot	15	
R.back	8	Gnd	2	
		Cold	14	
		Hot	1	

Alt/Main/Mini Output – DB25 Male on Cable				
Function	Channel	Function	Pin	Connector Rear
		Chassis	13	
		Chassis	13	
Mini Left	1	Gnd	25	
		Cold	12	
		Hot	24	
Mini Right	2	Gnd	11	
		Cold	23	
		Hot	10	
Alt L	3	Gnd	22	
		Cold	9	
		Hot	21	
Alt R	4	Gnd	8	
		Cold	20	
		Hot	7	
Main Ch 9	5	Gnd	19	
		Cold	6	
		Hot	18	
Main Ch 10	6	Gnd	5	
		Cold	17	
		Hot	4	
Main Ch 11	7	Gnd	16	
		Cold	3	
		Hot	15	
Main Ch 12	8	Gnd	2	
		Cold	14	
		Hot	1	

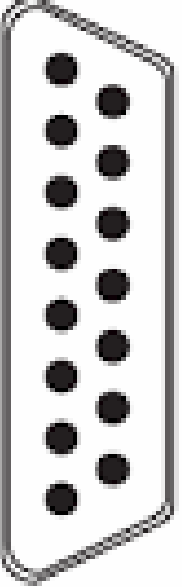
Main 1-8 Input – DB25 Male on Cable				
Function	Channel	Function	Pin	Connector Rear
		Chassis	13	
Left	1	Gnd	25	
		Cold	12	
		Hot	24	
Right	2	Gnd	11	
		Cold	23	
		Hot	10	
Center	3	Gnd	22	
		Cold	9	
		Hot	21	
LFE	4	Gnd	8	
		Cold	20	
		Hot	7	
L.Side	5	Gnd	19	
		Cold	6	
		Hot	18	
R.Side	6	Gnd	5	
		Cold	17	
		Hot	4	
L.Back	7	Gnd	16	
		Cold	3	
		Hot	15	
R.back	8	Gnd	2	
		Cold	14	
		Hot	1	

Alt(7.1)– DB25 Male on Cable				
Function	Channel	Function	Pin	Connector Rear
		Chassis	13	
Alt Left	1	Gnd	25	
		Cold	12	
		Hot	24	
Alt Right	2	Gnd	11	
		Cold	23	
		Hot	10	
Alt Center	3	Gnd	22	
		Cold	9	
		Hot	21	
Alt LFE	4	Gnd	8	
		Cold	20	
		Hot	7	
Alt L.Side	5	Gnd	19	
		Cold	6	
		Hot	18	
Alt R.Side	6	Gnd	5	
		Cold	17	
		Hot	4	
Alt L. Back	7	Gnd	16	
		Cold	3	
		Hot	15	
Alt R.Back	8	Gnd	2	
		Cold	14	
		Hot	1	

Stereo I/P 1 & 2, Main 9-12 – DB25 Male on Cable				
Function	Channel	Function	Pin	Connector Rear
		Chassis	13	
Stereo 1 Left	1	Gnd	25	
		Cold	12	
		Hot	24	
Stereo 1 Right	2	Gnd	11	
		Cold	23	
		Hot	10	
Stereo 2 Left	3	Gnd	22	
		Cold	9	
		Hot	21	
Stereo 2 Right	4	Gnd	8	
		Cold	20	
		Hot	7	
Main Ch. 9	5	Gnd	19	
		Cold	6	
		Hot	18	
Main Ch. 10	6	Gnd	5	
		Cold	17	
		Hot	4	
Main Ch. 11	7	Gnd	16	
		Cold	3	
		Hot	15	
Main Ch. 12	8	Gnd	2	
		Cold	14	
		Hot	1	

T/B, L/B, Cue 1 & 2 Input – DB25 Male on Cable				
Function	Channel	Function	Pin	Connector Rear
		Chassis	13	
Internal T/B	1	Gnd	25	
		Cold	12	
		Hot	24	
Listen 1	2	Gnd	11	
		Cold	23	
		Hot	10	
External T/B	3	Gnd	22	
		Cold	9	
		Hot	21	
Listen 2	4	Gnd	8	
		Cold	20	
		Hot	7	
St3/Cue 1 L	5	Gnd	19	
		Cold	6	
		Hot	18	
St3/Cue 1 R	6	Gnd	5	
		Cold	17	
		Hot	4	
St4/Cue 2 L	7	Gnd	16	
		Cold	3	
		Hot	15	
ST4/Cue 2 R	8	Gnd	2	
		Cold	14	
		Hot	1	

TMC-1 GPIO - DB15 Female on Cable

Default	Function	Pin	Connector Rear
	LTC In+	8	
	LTC In-	15	
	Ground	7	
H/W mute	GP-Out 0	14	
T/B 1 On	GP-Out 1	6	
T/B 2 On	GP-Out 2	13	
User	GP-Out 3	5	
Int T/B 1	GP-I/P 7	12	
Record	GP-I/O	4	
Play	GP-I/O	11	
Ext T/B 2	GP-I/P 4	3	
Ext T/B 1	GP-I/P 3	10	
Listen 2	GP-I/P 2	2	
Listen 1	GP-I/P 1	9	
AFL/PFL I/P	GP-I/P 0	1	